## **ELEVATION CERTIFICATE**

O.M.B. No. 3067-0077 Expires July 21 1999

## FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine roper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). You are not itself to respond to this collection of information unless a valid OMB control number is displayed in the upper right corner of this form.

|  |  |   | <u> </u>   |  |   |
|--|--|---|--|--|---|
| A Company  | SECTION A PR   | OPERTY INFO   | RMATION  | -  | FOR INSURANCE COMPANY USE   |
| BUILDING OWNER'S NAME<br>Peters Stearns  | entrining of a bi-   | may en !  |  |  | POLICY NUMBER   |
| STREET ADDRESS (Including Ap<br>3181 Bayou Sound   | ot., Unit, Suite and/or Bldg.  | Number) OR P.O. R   | ROUTE AND BOX NUMBER   |  | COMPANY NAIC NUMBER   |
| OTHER DESCRIPTION (Lot and Lot 9, Block A  | Block Numbers, etc.) Bay Isles   | Unit No. 2  |  | ******   |   |
| CITY Town of Longboat I  | (ey  |   | -  | STATE<br>Florida   | ZIP CODE  |
|  | SECTION B FI   | OOD INSURA  | NCE RATE MAP (FIRM)  | NFORMATION   |   |
| Provide the following from t   | he proper FIRM (See  | Instructions):  |  |  |   |
| 1.COMMUNITY NUMBER   | 2. PANEL NUMBER  | 3. SUFFIX   | 4. DATE OF FIRM INDEX May 18, 1992   | 5. FIRM ZONE   | 6. BASE FLOOD ELEVATION<br>(in AO Zones, use depth)<br>11   |
|  | feet N   | IGVD (or other  | FIRM datum-see Section   | B, Item 7)   | or this building site, indicate   |
|  | SECTION  | ON C BUILDI   | NG ELEVATION INFORM  | ATION  |   |
| <ul> <li>(c). FIRM Zone A (without below (check one)</li> <li>(d). FIRM Zone AO. The one) the highest grade level) elevated in account and contact the elevation day under Comments on Page</li> </ul> | the highest grade action used as the reference adjacent to the build ordance with the communitum system used in dige 2). (NOTE: If the B, Item 7], then converts on Page 2.) | d as the referent<br>diacent to the barence level from<br>ing. If no flood<br>nunity's floodplater<br>etermining the<br>elevation dature<br>and the elevation | uilding.  In the selected diagram is I depth number is available ain management ordinanc above reference level elev In used in measuring the ele Ins to the datum system use | diagram is feet a , is the building e? Yes rations: X NGV evations is differed on the FIRM | bove or below (check's lowest floor (reference No Unknown D'29 Other (describe rent than that used on |
|  |  |   |  |  |   |
| 5. The reference level eleval<br>(NOTE: Use of construct<br>case this certificate will of<br>will be required once con   | tion drawings is only<br>nly be valid for the bu   | valid if the build<br>ilding during the   | iction   | reference level  | floor in place, in which<br>tion Elevation Certificate  |
| 5. The elevation of the lower Section B, Item 7).  | est grade immediately  | adjacent to the   | e building is:5.   | [7] feet NGVD  | (or other FIRM datum-see  |
|  | SI   | CTION D CC  | MMUNITY INFORMATIO   | N  |   |
|  | s defined in the comm  | nunity's floodpla   | ain management ordinance<br>IGVD (or other FIRM datur  | e, the elevation   |   |


## SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available, I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

| CERTIFIER'S NAME                          | LICEN                             | LICENSE NUMBER (or Affix Seal) |                            |  |  |  |
|---|-----------------------------------|--------------------------------|----------------------------|--|--|--|
| John C. Minder, PE, PSM                   | PLS                               | 4071                           |                            |  |  |  |
| TITLE                                     | COMPANY NAME                      |                                |                            |  |  |  |
| President 6                               | Minder & Associate                | tes Engineering                | Corporation                |  |  |  |
| 345 Interstate Blvd, Bldg D               | CITY<br>Sarasota                  |                                | FL STATE 34240 ZIP         |  |  |  |
| SIGNATURE Store Mine                      | lev 5/2                           | DATE 17                        | PHONE 1-342-6232           |  |  |  |
| Copies should be made of this Certificate | for: 1) community official, 2) in | surance agent/compa            | ny, and 3) building owner. |  |  |  |
| COMMENTS:                                 | ry and .                          |                                | - El L. Str established    |  |  |  |
|   |                                   |                                |                            |  |  |  |
|   |                                   |                                |                            |  |  |  |

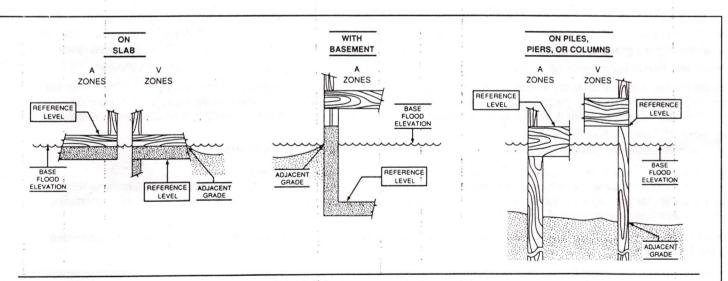

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.