## O.M.B. No 3067-0077 Expires May 31, 1993

## **ELEVATION CERTIFICATE**

## FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.

	SECTION A PR	DRMATION	B BOR ESUHANDE COMPANY USE						
BUILDING OWNER'S NAME		* **	man entre	111111111111111111111111111111111111111	POLICY NUMBER				
John Mucasey a									
STREET ADDRESS (Including Ap		Number) OR P.O. F	ROUTE AND BOX NUMBER	Inni 18	OMPANY NAIC NUMBER				
3347 Sabal Cor OTHER DESCRIPTION (Lot and				DIW	DING DEPARTMENT				
Lot 13, Block		Cove		BUILDING DEPARTMENT TOWN OF LONGBOAT KEY					
CITY			STATE	ZIP CODE					
Longboat Key				Florida	34228				
			ANCE RATE MAP (FIRM)	INFORMATION					
rovide the following from t	he proper FIRM (See	Instructions):							
1. COMMUNITY NUMBER	COMMUNITY NUMBER 2. PANEL NUMBER 3. SUFFIX 4. DATE OF FIRM INDEX				6. BASE FLOOD ELEVATION (in AO Zones, use depth)				
125126	0010	В	05/18/92	A-13	11'				
. Indicate the elevation dat	um system used on t	he FIRM for Ba	ase Flood Elevations (BFI	E): X NGVD '29	Other (describe on back)				
					this building site, indicate				
the community's BFE: L	feet N	GVD (or other	FIRM datum-see Section	n B, Item 7).					
	SECTION	ON C BUILDI	NG ELEVATION INFORM	MATION					
(c). FIRM Zone A (without below (check one) (d). FIRM Zone AO. The fone) the highest grade	is at an elevation of L BFE). The floor used the highest grade ad loor used as the refer adjacent to the build rdance with the comm rum system used in de e 2). (NOTE: If the	d as the referent lijacent to the bearned level from ing. If no flood nunity's floodpletermining the elevation datum	feet NGVD (or other FIF nee level from the selecte uilding. In the selected diagram is depth number is available ain management ordinan- above reference level ele- tern used in measuring the se	RM datum—see Sed d diagram is feet above, is the building's ce? Yes Nevations: NGVI felevations is different	ction B, Item 7).  Light feet above or or or or or or or below (check lowest floor (reference No Unknown O'29 Other (describe ent than that used on				
equation under Commen	ts on Page 2.)	_	_		tria snow the conversion				
Elevation reference mark									
The reference level eleval (NOTE: Use of construct case this certificate will on will be required once cons	tion dra <mark>wings i</mark> s only vally be valid for the bui	ralid if the build Iding during the	ding does not yet have the	e reference level fl	oor in place, in which on Elevation Certificate				
The elevation of the lower Section B, Item 7).	st grade immediately	adjacent to the	e building is: 8	.5 feet NGVD (d	or other FIRM datum-see				
	SE	CTION D CO	MMUNITY INFORMATION	ON					
. If the community official re is not the "lowest floor" as floor" as defined by the or	defined in the comm	unity's floodpla	ain management ordinand IGVD (or other F <u>I</u> RM datu	ce, the elevation of	f the building's "lowest				
Date of the start of constr	uction or substantial i	mprovement	4-12-96						

## SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1-A30, AE, AH, A (with BFE), V1-V30, VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features-If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.


I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

		LICENSE NUMBER (or Affix Seal)							
5228									
COMPANY NAME	<u> </u>								
Landry	£	Esber							
CITY					STATE		ZIP		
arasota					Florida		34232		
		07/30/96		PHO	NE (941)	379-	-8831		
-	Landry	CITY	COMPANY NAME Landry & Esber CITY Sarasota DATE	COMPANY NAME Landry & Esber CITY Sarasota DATE	COMPANY NAME Landry & Esber CITY Sarasota DATE PHO	COMPANY NAME Landry & Esber CITY STATE Florida DATE PHONE	COMPANY NAME Landry & Esber CITY STATE Sarasota Florida  DATE PHONE		

nunity official, 2) insurance agent/company, and 3) building owner.

COMMENTS:

Nontro be popposed to be a fact of

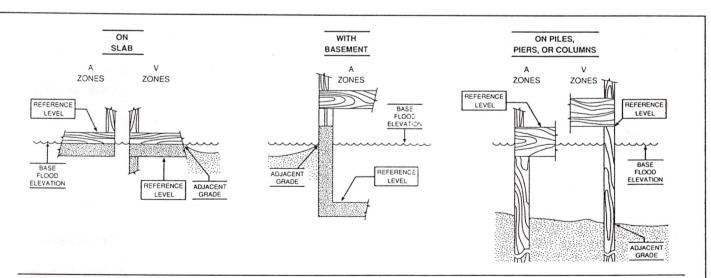

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.