ELEVATION CERTIFICATE

O.M.B. No 3067-0077 Expires May 31, 1993

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to retermine the proper insurance premium rate, and or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). Instructions for completing this form can be found on the following pages.

	FOR INSURANCE COMPANY USE				
BUILDING OWNER'S NAME	POLICY VLVBER				
STREET ADDRESS (Including A	ot., Unit. Suite and/or Bldg	Ni man OB BO D	POUTE AND DOY 11111		A sail
340 A (20/1	FOF MEX				COMPANY 'AIC NUMBER
Tangarina Par Ci					
Tangerine Bay C	ub Condominium	m, Building	g 1-A units III	. /21.12.3	112, 113, 133, 121,
Longboat Key				STATE	ZIP CODE
	SECTION D. E	LOCO INCLIDA		Florida	34228
Sovide the following from t			NCE RATE MAP (FIRM)	INFORMATION	
ovide the following from the		Instructions):			
1. COMMUNITY NUMBER	2. PANEL NUMBER	3 SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION (if 40 Zones, use depth)
125126	0010	В	8/15/83	A-13	11.0
Indicate the elevation dat	um system used on t	ha E:EM for Bar	So Flood Flooring (DFF		
For Zones A or V, where	no BFE is provided of	n the FIRM, and	d the community has esta	:): X_NGVD '29	Other describe on back) or this building site, indicate
the community's BFE:	feet N	IG Z or other I	FIRM datum-see Section	B Itom 7)	or this buding site, indicate
1247					
Using the Elevation Certification Certification Certification Certification (Certification Certification Certifica			IG ELEVATION INFORM		27 145 #11
below (check one) i). FIRM Zone AO. The floone) the highest grade level) elevated in according to the elevation daturate the elevation daturate. Comments on Page the FIRM [see Section Bed equation under Comments.	the highest grade ad por used as the refer adjacent to the buildi dance with the comm im system used in de 2). (NOTE: If the e 1 Item 7], then conver- 5 on Page 2.)	as the reference lacent to the burner level from ng. If no flood of the lacent is floodplain termining the allevation datumns the elevations	ilding. the selected diagram is depth number is available in management ordinance bove reference level elevused in measuring the elector the datum system uses	diagram is feet at , is the building! e? Yes ations: NGV evations is differed on the FIRM a	feet above or ove cr below (check s lowest foor (reférence No Linknown D'29 Cther (describe
Elevation refere <mark>n</mark> ce mark i	used appears on FIR	M: X Yes	No (See Instructions on	Page 4)	
The reference level elevation NOTE: Use of construction ase this certificate will only will be required once consti	on is based on: X on drawings is only very be valid for the built	actual construct	tion Construction dra	wings	loor in piace, in which on Elevaton Certificate
The elevation of the lowes Section B, Item 7).	· ·	adjacent to the b	ouilding is:6	feet NGVD (or other FIRM datum-see
	SE	CTION D COM	IMUNITY INFORMATION		
the community official resonot the "lowest floor" as cor" as defined by the ordestee of the start of construction	sponsible for verifying defined in the communication in the communication is:	building elevat unity's floodplair 6.5 feet NG	tions specifies that the ret	ference level ind	£ 4L - L '' - L ms


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway son-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

Dennis Hoover	441	9		
CERTIFIER'S NAME	LICENSE NUMB			
Registered Land Surveyor	Bishop & Associate	es, Inc.		
TITLE	COMPANY NAME		a might pre-	V LICE WALL THAT
78 Sarasota Center Boulevard	Sarasota	1	Florida	34240
ADDRESS ()	city co/z//a	/ 9 / (813)	STATE 371-6362	ZIP
SIGNATURE	OATE	РНО	NE	
COMMENTS:		-		1
A 518 6 18 18 18 18 18 18 18 18 18 18 18 18 18			1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
				280
Transfer Marie Mar				

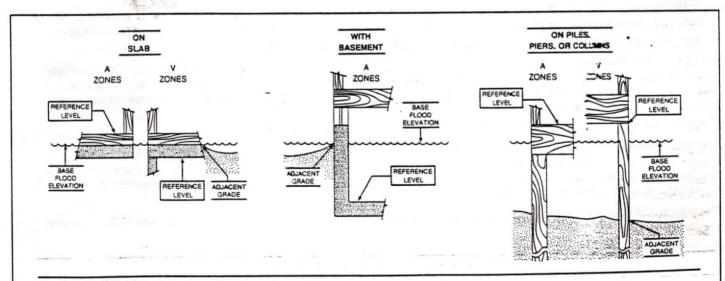

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.

THE PERMIT