## **ELEVATION CERTIFICATE**

O.M.B. No 3067-0077 Expires May 31, 1993

## FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

\*\*TTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to ovide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION					FOR INSURANCE COMPANY USE	
BUILDING OWNER'S NAME					POLICY NUMBER	
Bowyer	r 1+88	00		D 1		
	istletoe	lumber) OR P.O. F		= *	COMPANY NAIC NUMBER	
OTHER DESCRIPTION (Lot and I	Block Numbers, etc.)	andi	in 9			
CITY Longboat Key	3		7	STATE FL	ZIP CODE 34228	
	SECTION B FL	OOD INSURA	NCE RATE MAP (FIRM)	INFORMATION		
Provide the following from the	ne proper FIRM (See	Instructions):			ماسيس و الماسيس	
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6 BASE FLOOD ELEVATION (in AO Zones, use depth)	
125126	0010	В	8-15-83	A-13	12.9'	
7. Indicate the elevation dat	um system used on th	e FIRM for Ba	ase Flood Elevations (BFE	): X NGVD '29	Other (describe on back)	
8. For Zones A or V, where the community's BFE:			FIRM datum-see Section		or this building site, indicate	
SECTION C BUILDING ELEVATION INFORMATION						
of 12.0 fee  (b). FIRM Zones V1-V30, V the selected diagram, i  (c). FIRM Zone A (without below (check one)  (d). FIRM Zone AO. The fl one) the highest grade level) elevated in accor  3. Indicate the elevation datunder Comments on Page	ilding's reference lever AE, AH, and A (with B to NGVD (or other FIRITY), and V (with BFE). It are also at an elevation of the highest grade adjusted to the building adjacent to the building and a system used in deception of the end of the en	FE). The top of M datum—see is The bottom of as the reference level from the business of the business of the business of the elevation datum of the elevation of the second in the elevation of the elevation of the second in the sec	of the reference level floor Section B, Item 7). If the lowest horizontal struction is the lowest horizontal struction in the selected diagram is depth number is available ain management ordinance above reference level elevel as to the datum system use is section in the selected diagram is depth number is available ain management ordinance above reference level elevel as to the datum system use the section is section in the selected diagram in the selected diagram is depth number is available ain management ordinance above reference level elevel as to the datum system use the section is selected diagram in the selected diagram is depth number is available and the selected diagram is depth number is available as	from the selected cuctural member of datum—see Selected diagram is consisted and the second diagram is consisted diagram in the second diagram is consisted diagram in the second diagram in the second diagram is consisted diagram in the second diagram in the second diagram is consisted diagram in the second diagram in the second diagram is consisted diagram in the second diagram is consisted diagram in the second diagram is consisted diagram is co	ed diagram is at an elevation  of the reference level from ection B, Item 7).  level feet above or  ove X or below (check is lowest floor (reference) No Unknown  of 129 Other (describe)	
5. The reference level eleval (NOTE: Use of construct case this certificate will on will be required once cons	ion drawings is only va ly be valid for the build	alid if the build	ing does not yet have the	reference level	floor in place, in which ion Elevation Certificate	
<ol><li>The elevation of the lowes Section B, Item 7).</li></ol>	st grade immediately a	adjacent to the	building is: $11$	0 feet NGVD (	or other FIRM datum-see	
	SEC	CTION D CO	MMUNITY INFORMATION	N		
If the community official re is not the "lowest floor" as floor" as defined by the or 2. Date of the start of constru	dinance is:	linity's floodpla	ations specifies that the re in management ordinance GVD (or other FIRM datun	, the elevation of	dicated in Section C, Item 1 of the building's "lowest I, Item 7).	


## SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features–If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

44			
COMPANY NAME			
Bishop & As			
CITY		STATE	ZIP
Sarasota		FL	34240
	DATE 10-29-90 PHONE	371-6362	
community official, 2) ir	surance agent/company, and	3) building ow	ner.
		No.	
	COMPANY NAME Bishop & Ass CITY Sarasota	Bishop & Associates  CITY Sarasota  DATE  10-29-90  PHONE	COMPANY NAME Bishop & Associates  CITY STATE Sarasota FL  DATE PHONE

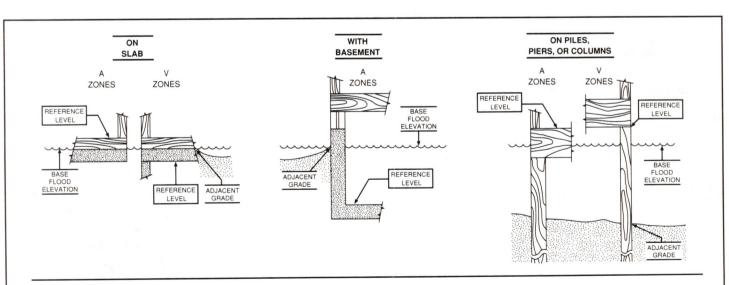

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.