## **ELEVATION CERTIFICATE**

O.M.B. No 3067-0077 Expires May 31, 1993

## FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION		FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME		POLICY NUMBER
Boyer & Assoc		
STREET ADDA'SS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER  3543 Mistletoe Lane		COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and Block Numbers, etc.)		
Lot 65 Corey's Landing		
Longboat ley FL 34228	STATE	ZIP CODE
SECTION B FLOOD INSURANCE RATE MAP (FIRM	I) INFORMATION	
Provide the following from the proper FIRM (See Instructions):		
1. COMMUNITY NUMBER 2. PANEL NUMBER 3. SUFFIX 4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION (in AO Zones, use depth)
125126 0010 B Aug. 15, 1983	A13	11.0'
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFB. For Zones A or V, where no BFE is provided on the FIRM, and the community has es the community's BFE:	tablished a BFE fo	
SECTION C BUILDING ELEVATION INFOR		=======================================
of 1 1 1.0 feet NGVD (or other FIRM datum—see Section B, Item 7).  (b). FIRM Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal set the selected diagram, is at an elevation of 1 feet NGVD (or other FIC). FIRM Zone A (without BFE). The floor used as the reference level from the selected below (check one) the highest grade adjacent to the building.  (d). FIRM Zone AO. The floor used as the reference level from the selected diagram is one) the highest grade adjacent to the building. If no flood depth number is available level) elevated in accordance with the community's floodplain management ordinary. Indicate the elevation datum system used in determining the above reference level elevated Comments on Page 2). (NOTE: If the elevation datum used in measuring the the FIRM [see Section B, Item 7], then convert the elevations to the datum system of equation under Comments on Page 2.)	RM datum—see Seed diagram is  s	cction B, Item 7).  detection B, Item 7).  de
4. Elevation reference mark used appears on FIRM: 🗷 Yes 🗌 No (See Instructions	on Page 4)	
5. The reference level elevation is based on:   (NOTE: Use of construction drawings is only valid if the building does not yet have the case this certificate will only be valid for the building during the course of construction will be required once construction is complete.)  6. The elevation of the lowest grade immediately adjacent to the building is:	ne reference level A post-construct	floor in place, in which ion Elevation Certificate or other FIRM datum-see
Section B, Item 7).		
SECTION D COMMUNITY INFORMATI	ON	
If the community official responsible for verifying building elevations specifies that the is not the "lowest floor" as defined in the community's floodplain management ordinar floor" as defined by the ordinance is:	nce, the elevation	of the building's "lowest


## SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME LICENSE NUMBER (or Affix Seal) 4349 Alex S. Esber COMPANY NAME TITLE Bishop & Associates **ADDRESS** CITY STATE ZIP FL34240 Sarasota 78 Sarasota Center Bøulevard DATE PHONE 12 February 1991 813/371-6362 Copies should be made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building owner.

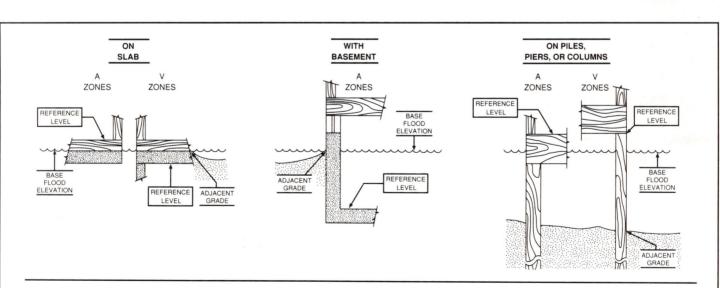

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

COMMENTS:

En

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.