11.80.01

O.M.B. NO. 3067-0077 Expires May 31, 1996

## **ELEVATION CERTIFICATE**

## FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

**ATTENTION:** Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION					FOR INSURANCE COMPANY USE	
BUILDING OWNER'S NAME Taylor Woodrow H		POLICY NUMBER				
STREET ADDRESS (Including Ap 3555 FAIR	t., Unit, Suite and/or Bldg. No	umber) OR P.O. F	ROUTE AND BOX NUMBER		COMPANY NAIC NUMBER	
OTHER DESCRIPTION (Lot and I	Block Numbers, etc.) ester Bay	Ti gale v	ather was			
CITY Longboat Key				STATE Florida	ZIP CODE 34228	
	SECTION B FL	OOD INSURA	ANCE RATE MAP (FIRM)	INFORMATION		
Provide the following from t	ne proper FIRM (See I	nstructions):	1000			
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION (in AO Zones, use depth)	
125126	0010	В	May 18, 1992	A-13	12	
<ol><li>For Zones A or V, where</li></ol>	no BFE is provided or	the FIRM, a	ase Flood Elevations (BFt and the community has est FIRM datum-see Section	ablished a BFE I	Other (describe on back or this building site, indicate	
	SECTIO	NC BUILD	ING ELEVATION INFORM	MATION	TO STATE OF A	
(c). FIRM Zone A (without below (check one	t BFE). The floor used the highest grade ad	I as the refere jacent to the I	building.	d diagram is 🗀	. feet above or	
below (check one	) the highest grade ad floor used as the refer	jacent to the lence level fro	building. om the selected diagram is	feet a	above 🗌 or below 🗔 (check	
one) the highest grad- level) elevated in acco	e adjacent to the build ordance with the comm	ing. If no floo nunity's floodp	d depth number is availab blain management ordinar	ile, is the building ice?	No Unknown	
Indicate the elevation da under Comments on Pa the FIRM [see Section equation under Comme	atum system used in d ge 2). (NOTE: If the o B, Item 7], then conve nts on Page 2.)	etermining the elevation datu ert the elevation	e above reference level elements and used in measuring the cons to the datum system to	evations: X NG elevations is differ used on the FIRM	VD '29 U Other (describe	
4. Elevation reference mar			The state of the s			
case this certificate will o will be required once con	ction drawings is only only be valid for the bunstruction is complete.	valid if the bui ilding during t )	ilding does not yet have the course of construction.	e reference leve A post-constru	ction Elevation Certificate	
<ol><li>The elevation of the low Section B, Item 7).</li></ol>	est grade immediately	adjacent to t	he building is:	. L. feet NGVD	o (or other FIRM datum-see	
1	s	ECTION D C	COMMUNITY INFORMAT	ION		
is not the "lowest floor"	as defined in the commordinance is:	munity's flood feet	plain management ordina : NGVD (or other FIRM da	nce, the elevation	indicated in Section C, Item on the building's "lowest B, Item 7).	

01 01 1111/02


## SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

		105 111 11050 / 1/5	0 1	300
CERTIFIER'S NAME	LICEN	ISE NUMBER (or Affix	Seal)	3.000
Mark E. Bassett		4394	373 849	30
TITLE	COMPANY NAME			
Professional Land Surveyor	Bishop &	Associates	16-74	- mannan -
ADDRESS	CITY		STATE	ZIP
78 Sarasota Center Boulevard	Sarasota		Florida	34228
SIGNATURE Mak E. Bayett		6715/94	(813) 371-6362	
COMMENTS:				Villa Balker
COMMENTS:				1
			2.15	
		and the second s		

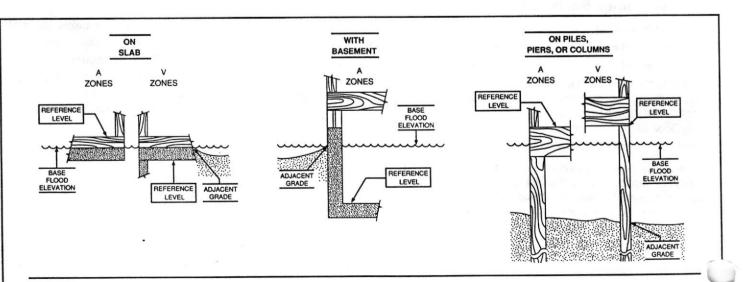

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.