O.M.B. NO. 3067-0077 Expires May 31, 1996

ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to mine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.

	SECTION A PR	OPERTY INFO	ORMATION		FOR
BUILDING OWNER'S NAME		DEGI	POLICY NUMBER		
STREET ADDRESS (Including A	D. Bitterman	Number) OR BO	BOUTE AND BOWARD	DEG	
STO Harb	or hate way	Number) OA P.O. I	HOUTE AND BOX NUMBER	1/0/1	COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and	Block Numbers, etc.) y Isles Unit 1			-Inni	
CITY	y isles unit i			BUILDIN	G DEPARTMENT
Longboat				STATEMNO	ZIP CODE
	SECTION B FL	OOD INSURA	NCE RATE MAP (FIRM)	INFORMATION	
Provide the following from t	he proper FIRM (See	Instructions):			
1. COMMUNITY NUMBER	2. PANEL NUMBER	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION	
125126	0010	D	5-18-92		(in AO Zones, use depth)
7. Indicate the elevation dat	um system used on th	The state of the s	3-10-92	A13	Other (describe on back)
	The man and provided of	I UIC I II IVI. AII	U III COMMUNITO DO DOCA	DICKAR & DEF 1-	Other (describe on back)
the community's BFE:	feet No	GVD (or other I	FIRM datum-see Section	B, Item 7)	this building site, indicate
			IG ELEVATION INFORM		
Using the Elevation Certification describes the subject but	The second secon				
below (check one) (d). FIRM Zone AO. The floone) the highest grade a level) elevated in accord. Indicate the elevation datu under Comments on Page the FIRM [see Section B, equation under Comments. Elevation reference mark to	BFE). The floor used at the highest grade adjacent to the building dance with the community system used in detail (NOTE: If the electron 7), then convert to on Page 2.)	as the reference acent to the building level from g. If no flood of unity's floodplaidermining the above the elevations	feet NGVD (or other FIRM to level from the selected ilding. the selected diagram is been to management ordinance to ove reference level elevalused in measuring the elevalused in measuring the elevalused in measuring the selected to the datum system use	datum—see Sec diagram is feet abo is the building's ? Yes N ations: NGVD evations is different d on the FIRM an	tion B, Item 7) feet above or or below (check flowest floor (reference) Unknown '29 Other (describe)
. The reference level elevation (NOTE: Use of construction case this certificate will only will be required once construction).	on is based on: and an armonic of an armonic of an armonic of an armonic of the building of th	ctual constructi	ion Construction drav	vings	or in place, in which a Elevation Certificate
The elevation of the lowest Section B, Item 7).	grade immediately ad	ljacent to the b	uilding is: 7.2	feet NGVD (or	other FIRM datum-see
	SECT	TION D COM	MUNITY INFORMATION	/	
If the community official response the "lowest floor" as defined by the ordinate of the start of construction	ponsible for verifying the efined in the communication is:	ouilding elevation	ons specifies that the refe	erence level indicate the elevation of the see Section B, Ita	ated in Section C, Item 1 ne building's "lowest em 7).

2.

SECTION E CERTIFICATION


This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features-If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

Owney	Contraction of the second	45-4-24-964-2	COMPANY NAME			

ADDRESS .	PA 10	- 4	Red Stake Surveyors	, Inc.		
	Procton Rd	2	Sarasota		STATE FL	ZIP 34241
(1)	aur III)	non	munity official, 2) insurance agent/comp	PHONE	-923-9997	

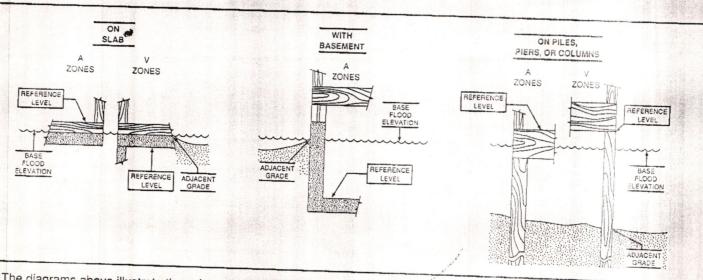

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones. Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.