ELEVATION CERTIFICATE FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Lutter of Map Amendment or Revision (LOMA or LOMR) Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION	manife marine and	FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME -RONE MARILYN	- 480 - 1800. •	POLICY NUMBER
STREET ADDRESS (Including Apt., Unit. Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER	9, 2091 148 M - Step	COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and Block Numbers, etc.)	1980	
LONGBOAT KEY	FL.	ZIP CODE 34228
SECTION B FLOOD INSURANCE RATE MAP (FIRM) I	NFORMATION	N KOBLAR
Provide the following from the proper FIRM (See Instructions):	N color	
1. COMMUNITY NUMBER 2. PANEL NUMBER 3. SUFFIX 4. DATE OF FIRM INDEX 125126 0005 0 5-18-92	5. FIRM ZONE A-13	6 BASE FLOOD ELEVATION In AO Zones, use depth)
. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE) B. For Zones A or V, where no BFE is provided on the FIRM, and the community has estal the community's BFE: feet NGVD (or other FIRM datum-see Section	B, Item 7).	or this building site, indicate
SECTION C BUILDING ELEVATION INFORM	ATION	- r
 describes the subject building's reference level 2(a). FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor of (b). FIRM Zones V1-V30, VE. and V (with BFE). The bottom of the lowest horizontal structhe selected diagram, is at an elevation of feet NGVD (or other FIRM (c). FIRM Zone A (without BFE). The floor used as the reference level from the selected below (check one) the highest grade adjacent to the building. 	uctural member o M datum-see Se	of the reference level from ction B, Item 7).
(d). FIRM Zone AO. The floor used as the reference level from the selected diagram is one) the highest grade adjacent to the building. If no flood depth number is available level) elevated in accordance with the community's floodplain management ordinance	e, is the building	No Unknown
3. Indicate the elevation datum system used in determining the above reference level elevel under Comments on Page 2). (NOTE: If the elevation datum used in measuring the elevation FIRM [see Section B. Item 7], then convert the elevations to the datum system use equation under Comments on Page 2.)	evations is differ ed on the FIRM	ent than that used on
. Elevation reference mark used appears on FIRM: Yes KNo (See Instructions on		i din sene
5. The reference level elevation is based on: \swarrow actual construction construction drawings is only valid if the building does not yet have the case this certificate will only be valid for the building during the course of construction. We will be required once construction is complete.)	reference level i A post-construct	ion Elevation Certificate

floor" as defined by the ordinance is: _______ feet NC 2. Date of the start of construction or substantial improvement

SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.


Reference level diagrams 6, 7 and 8 - Distinguishing Features-If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001

ICHARN 5. YADA LICENSE NUMBER (or Affix Seal) CERTIFIER'S NAME YAPR COMPANY NAME TITLE RADENTON 1014 CITY ZIP ADDRESS PHONE SIGNATURE DATE 813) 758.4500 D-

Copies should be made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building owner.

COMMENTS: _ **

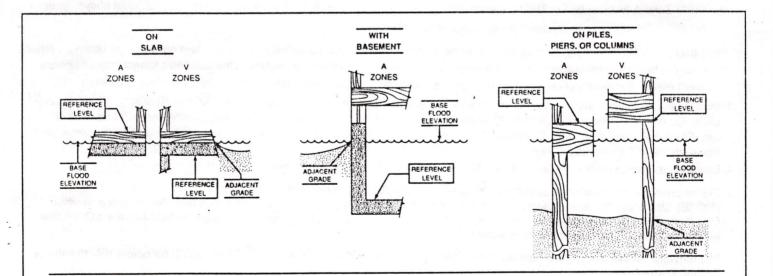

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.