ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

TENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION					FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME					POLICY NUMBER
STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER					COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and I	600 BIRDIE Block Numbers, etc.)	_LANE			
		LOI	1, BLOCK B, C		UB SHORES UNIT 5
CITY		LONGBOA	T KEY, FL.	STATE	21P CODE 34228
,	SECTION B F	LOOD INSURA	NCE RATE MAP (FIRM)	INFORMATION	
Provide the following from the	he proper FIRM (See	Instructions):			
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	-4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION - (in AO Zones, use depth)
125126	0010	В	5-18-92	A-13	E1. 11'
8. For Zones A or V, where	no BFE is provided of	n the FIRM, an		ablished a BFE f	Other (describe on back) or this building site, indicate
	SECTION	ON C BUILDI	NG ELEVATION INFORM	MATION	
the selected diagram, (c). FIRM Zone A (without below (check one) (d). FIRM Zone AO. The fone) the highest grade level) elevated in acco. 3. Indicate the elevation dat under Comments on Page the FIRM [see Section Bequation under Comments.]	VE, and V (with BFE) is at an elevation of L BFE). The floor used the highest grade action used as the reference adjacent to the build redance with the commum system used in de 2). (NOTE: If the 63, Item 7], then converts on Page 2.)	. The bottom of the bottom of the level from the bottom of the bottom of the bottom of the bottom of the elevation datument the elevation of the levation of t	of the lowest horizontal strong of the lowest horizontal strong feet NGVD (or other FIF nee level from the selecter uilding. In the selected diagram is a depth number is available ain management ordinance above reference level element used in measuring the ensity of the datum system used. No (See Instructions of the datum system used.)	IM datum—see Sed diagram is Line feet a e, is the building ce? The second representations: The second representations is different feed on the FIRM on Page 4)	bove or below (check 's lowest floor (reference No Unknown /D '29 Other (describe
5. The reference level eleval (NOTE: Use of construct case this certificate will or will be required once cons	tion drawings is only nly be valid for the bu	valid if the build ilding duting the	ding does not yet have the	reference level	
The elevation of the lowe Section B, Item 7).	st grade immediately	adjacent to the	e building is: 🔲 📙	. Ifeet NGVD	(or other FIRM datum-see
	SI	ECTION D CC	MMUNITY INFORMATIO)N	
1. If the community official results in the "lowest floor" as floor" as defined by the office. 2. Date of the start of construction.	s defined in the comm rdinance is:	nunity's floodpla	vations specifies that the rain management ordinand IGVD (or other FIRM datu イ~ 9~93	e, the elevation	


SECTION E CERTIFICATION

his certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code. Section 1001.

CERTIFIER'S NAME PROF LIND SURVEYOR - OWNER & PRES. ROBINSON LAND SURVEYING TITLE 1225 SECOND ST. COMPANY NAME SARASOTA FL. 34: **STATE** **	136
TITLE 1225 SECOND ST. COMPANY NAME SARASOTA FL. 342 ADDRESS CITY STATE	136
ADDRESS CITY STATE	126
SINE	
	ZIP
SIG HORE PHONE	
Community official, 2) insurance agent/company, and 3) building owner.	r.
•	

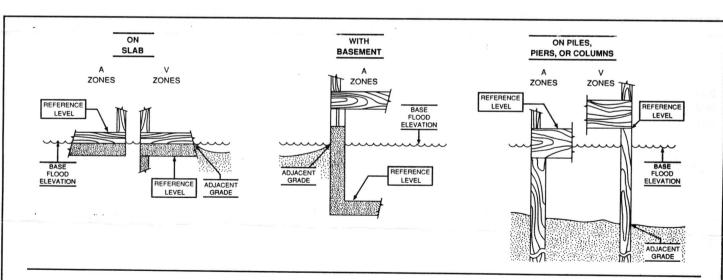

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.