ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

Je elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.

	SECTION A PROPERTY INFO	ORMATION	material Jed	FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME	And the second second			POLICY NUMBER
Weston Point				
STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER 1				COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot an			<u> </u>	
	con Pointe			
Town of Lond		TIME.	STATE Florida	ZIP CODE
	SECTION B FLOOD INSURA	ANCE RATE MAP (FIRM)	INFORMATION	
Provide the following from	the proper FIRM (See Instructions):	<u> </u>	44.7	
1. COMMUNITY NUMBER	2 PANEL NUMBER 3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION
125126	0010 В	05-18-92	A13	(in AO Zones, use depth) EL 11
For Zones A or V, where	atum system used on the FIRM for Ba e no BFE is provided on the FIRM, an little feet NGVD (or other	nd the community has esta	blished a BFE fo	Other (describe on back) or this building site, indicate
<u> </u>	SECTION C BUILDIN	NG ELEVATION INFORM	NOITA	Alpha and a second
 (b). FIRM Zones V1-V30, the selected diagram, (c). FIRM Zone A (without below (check one) (d). FIRM Zone AO. The one) the highest grade level) elevated in accollidicate the elevation dat under Comments on Pag the FIRM [see Section Be equation under Comment 	et NGVD (or other FIRM datum—see Silve, and V (with BFE). The bottom of is at an elevation used as the reference the highest grade adjacent to the building. If no flood of adjacent to the building. If no flood of ordance with the community's floodplatum system used in determining the at each of the elevation datum of the elevation of the elevations of the elevations of the elevations of the elevation of t	f the lowest horizontal stru- feet NGVD (or other FIRM ce level from the selected uilding. In the selected diagram is a depth number is available tin management ordinance above reference level elev- used in measuring the ele- is to the datum system uses	datum—see Se diagram is	ction B, Item 7). J. L feet above or ove or below (check blowest floor (reference) No Unknown D'29 Other (describe)
The reference level eleva (NOTE: Use of construct	tion is based on: A actual construction drawings is only valid if the building be valid for the building during the	tion construction draing does not yet have the	wings reference level fla	oor in place, in which on Elevation Certificate
The elevation of the lowes Section B, Item 7).	st grade immediately adjacent to the t	building is: 109.	8 feet NGVD (o	r other FIRM datum-see
	SECTION D CON	MMUNITY INFORMATION	ria e ta deleve	in Astronovico constituido
floor" as defined by the or	esponsible for verifying building elevated defined in the community's floodplain	tions specifies that the ref	erence level indi the elevation of	the building's "lowest


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features-If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

	The state of the s
CERTIFIER'S NAME	LICENSE NUMBER (or Allix Seal)
John C. Minder, PE, PLS	4071
TITLE	COMPANY NAME
President	Minder & Rhodes Engineering Corporation
ADDRESS	CITY O U 2 C STATE ZIP
3900 Clark Road, Suite H-3	Sarasota 3423
SIGNATURE MANEY	DATE PHONE 21. 1993 813-922-7848
Copies should be made of this Certificate for: 1) of	community official, 2) insurance agent/company, and 3) building owner.
COMMENTS:	
	separate the section of the section

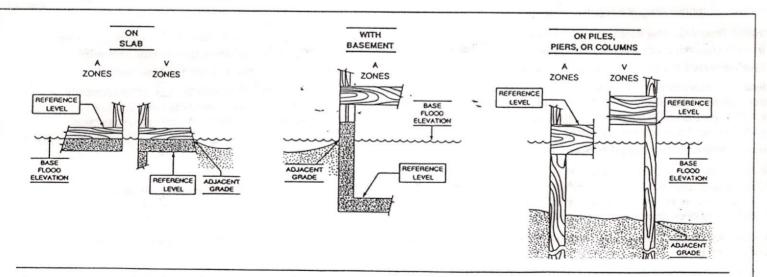

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.