ELEVATION CERTIFICATE

O.M.B. No. 3067-0077 Expires July 31, 1999

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). You are not required to respond to this collection of information unless a valid OMB control number is displayed in the upper right corner of this form.

		ompleting thi	s form can be found on	the follow	mig p	ayes.
SECTION A PROPERTY INFORMATION					E	FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME	-1	JII.	TOTAL CONTRACTOR	13		POLICY NUMBER
STREET ADDRESS (Including Ap	oleman	Number) OR PO	ROLLTE AND BOX NUMBER	1001	MAY	COMPANY NAIC NUMBER
	ongboAfor		TOOTE AND BOX NOMBER			OCIMI AIVI 44AIO II GINIDEI
OTHER DESCRIPTION (Lot and E	Block Numbers, etc.)	///	011-	Bk	ILDIN	DEPARTMENT
North 120	f 614 A	AND Allo	f 601 5 (ongbe	1	LINGBOAT KEY
CITY	KOV			STAT	E /	34228
	SECTION B F	LOOD INSURA	NCE RATE MAP (FIRM)	INFORMA	TION	
Provide the following from the	ne proper FIRM (See	Instructions):				
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM Z	ONE	6. BASE FLOOD ELEVATION
125/26	0005	D	MAY 18 9%	A-	13	(in AO Zones, use depth)
7. Indicate the elevation dat	um system used on t	he FIRM for Ba	ase Flood Flevations (RFI). VNGV	מכי ח'	Other (describe on back)
						or this building site, indicate
the community's BFE:	feet N	IGVD (or other	FIRM datum-see Section	B, Item 7)		
	SECTION	ON C BUILDI	NG ELEVATION INFORM	MATION		
of/5 fee (b). FIRM Zones V1-V30, V the selected diagram, i (c). FIRM Zone A (without below (check one) (d). FIRM Zone AO. The fone) the highest grade level) elevated in accordance in the selevation dat under Comments on Page the FIRM [see Section Enguation under Comments]	ot NGVD (or other FIF VE, and V (with BFE) is at an elevation of L BFE). The floor used the highest grade action used as the refer adjacent to the build redance with the commum system used in due 2). (NOTE: If the 63, Item 7], then converts on Page 2.)	RM datum—see The bottom of the bottom of the das the reference das the reference date of the bottom	Section B, Item 7). If the lowest horizontal structure is feet NGVD (or other FIF) ince level from the selecter uilding. In the selected diagram is depth number is available ain management ordinance above reference level elements to the datum system uses to the datum system uses.	ructural me M datum—s d diagram i e, is the bu ce? Ye vations: Y elevations is	mber see Ses Lifeet a ilding s Lifeet MGN s diffe	bove or below (check 's lowest floor (reference No Unknown /D '29 Other (describe
4. Elevation reference mark						
5. The reference level eleva (NOTE: Use of construct case this certificate will on will be required once cons	tion drawings is only to aly be valid for the but	valid if the build ilding during the	ling does not yet have the	reference	level struct	floor in place, in which tion Elevation Certificate
The elevation of the lower Section B, Item 7).	st grade immediately	adjacent to the	e building is: \	. 5 feet No	GVD	(or other FIRM datum-see
2595	SI	CTION D CO	MMUNITY INFORMATION	N		
is not the "lowest floor" as floor" as defined by the or 2. Date of the start of constr	defined in the community dinance is:	nunity's floodpla	rations specifies that the rain management ordinance GVD (or other FIRM datu	e, the eleva	ation	


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME	LICENSE NUMBER (or Affix Seal)			
TONY L. F	URSley 4451			
PSM:	Bob CROSS Professional /A	Nd Surveying PA		
DDRESS 5004-58	646. BeAden CON	Florials ZIP		
SIGNATURE DOSS	Plusly DATE 5/4	1/98 PHONE 7961512		
Copies should be made	of this Certificate for: 1) community official, 2) insurance age	ent/company, and 3) building owner.		
# ST. H. # 15 9 / 1		1		
COMMENTS:	Nish Floon = 15.13			
60	west BeAm = 12-51	arm atos the and a state of a		
	Round = 2.51=			
D		-77 ad		
Kevi	sed Firm Index = 3	.66-48		

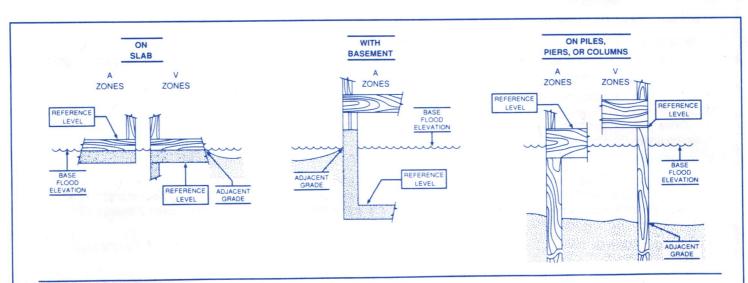

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.