U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2018

ELEVATION CERTIFICATE Important: Follow the instructions on pages 1–9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SEC	TION A - PROPERTY INF	ORMATION		FOR INSU	RANCE COMPANY USE
A1. Building Owner's Name				Policy Num	ber:
Richard & Kimberly Lyons					
A2. Building Street Address (in Box No. 605 Roundtree Drive	cluding Apt., Unit, Suite, ar	nd/or Bldg. No.) or P.O.	Route and	Company N	IAIC Number:
City	N. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1.	State		ZIP Code	
Longboat Key		Florida		34228	
A3. Property Description (Lot a Lot 8, Block C Longboat Key Es			scription, etc.)		
A4. Building Use (e.g., Resider	ntial, Non-Residential, Addi	tion, Accessory, etc.)	Residential		
A5. Latitude/Longitude: Lat. N	27°23'14" Lon	g. W 82°38'13"	Horizontal Datum:	□ NAD 1	1927 X NAD 1983
A6. Attach at least 2 photograp	hs of the building if the Ce	rtificate is being used to	obtain flood insura	nce.	
A7. Building Diagram Number	7				
A8. For a building with a crawls	pace or enclosure(s):				
 a) Square footage of crawl 	space or enclosure(s)	3,289 sq ft			
b) Number of permanent fl	ood openings in the crawls	pace or enclosure(s) w	ithin 1.0 foot above	adjacent gr	ade15
c) Total net area of flood o	penings in A8.b1,920	sq in			
d) Engineered flood openir	igs? 🛛 Yes 🗌 No				
A9. For a building with an attack	ned garage:				
a) Square footage of attact	ned garage 0	sq ft			
b) Number of permanent flo	ood openings in the attach	ed garage within 1.0 fo	ot above adiacent gr	ade	0
c) Total net area of flood or					-
d) Engineered flood opening	POTT MATERIAL RESIDENCE				
a, mightoriou hood opolini	igo. [] los [] ito				
SE	CTION B - FLOOD INSU	JRANCE RATE MAP	(FIRM) INFORMAT	ION	
B1. NFIP Community Name & C Town of Longboat Key 125126	community Number	B2. County Name Sarasota			B3. State Florida
B4. Map/Panel B5. Suffix Number	B6. FIRM Index Date	7. FIRM Panel Effective/	B8. Flood Zone(s)	(Zoi	e Flood Elevation(s) ne AO, use Base
12115C0019 F	11/04/2017 11	Revised Date 1/04/2017	AE	10	od Depth)
B10. Indicate the source of the	Base Flood Elevation (BFE	E) data or base flood de	pth entered in Item	B9:	The state of the s
☐ FIS Profile 🗵 FIRM	Community Determine	d Other/Source:			
B11. Indicate elevation datum u	sed for BFE in Item B9:] NGVD 1929 ⊠ NA	VD 1988 🔲 Oth	er/Source:	-
B12. Is the building located in a	Coastal Barrier Resource	s System (CBRS) area	or Otherwise Protect	ted Area (0	DPA)? ☐ Yes ☒ No
Designation Date:	☐ CBR	RS OPA			
ARTON CANADA CAN		acassiv			

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the correspond	ding information from Sec	tion A.	FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Suite, an 605 Roundtree Drive	d/or Bidg. No.) or P.O. Rou	te and Box No.	Policy Number:
City Longboat Key	State ZIP Florida 342	Code 28	Company NAIC Number
SECTION C - BUILDING	ELEVATION INFORMAT	TION (SURVEY RE	EQUIRED)
C1. Building elevations are based on: Constru		ding Under Constru	ction* Finished Construction
C2. Elevations – Zones A1–A30, AE, AH, A (with BF Complete Items C2.a–h below according to the Benchmark Utilized: GIS 086 Indicate elevation datum used for the elevations	building diagram specified i Vertical Datum:	n Item A7. In Puert 5.04	AE, AR/A1–A30, AR/AH, AR/AO. o Rico only, enter meters.
☐ NGVD 1929 🗵 NAVD 1988 🔲 Ott			
Datum used for building elevations must be the	same as that used for the B	FE.	Check the measurement used.
a) Top of bottom floor (including basement, cra	wispace, or enclosure floor)	3.6	X feet meters
b) Top of the next higher floor		<u>14</u> . 4	x feet meters
c) Bottom of the lowest horizontal structural me	mber (V Zones only)	N/A	x feet meters
d) Attached garage (top of slab)		N/A	x feet meters
e) Lowest elevation of machinery or equipment (Describe type of equipment and location in	servicing the building Comments)	14. 2	x feet meters
f) Lowest adjacent (finished) grade next to built	ding (LAG)	<u>3</u> . <u>2</u>	X feet meters
g) Highest adjacent (finished) grade next to buil	ding (HAG)	3.4	x feet meters
h) Lowest adjacent grade at lowest elevation of structural support	deck or stairs, including	3. 6	X feet meters
SECTION D - SURVEY	OR, ENGINEER, OR ARC	HITECT CERTIFI	CATION
This certification is to be signed and sealed by a land I certify that the information on this Certificate repres statement may be punishable by fine or imprisonmen	ents my best efforts to inter	pret the data availa	law to certify elevation information. ble. I understand that any false
Were latitude and longitude in Section A provided by	a licensed land surveyor?	⊠Yes □No	Check here if attachments.
Certifier's Name James Burchett	License Number LS 5701		JBBW LIX
Title			LS-5701
President			12/31/16
Company Name Sampey, Burchett and Knight, Inc			Plače Seal
Address 1570 Global Court			Here
City Sarasota	State Florida	ZIP Code 34240	
Signature Bucht	Date 12/31/2016	Telephone (941) 342-0349	
Copy all pages of this Elevation Certificate and all attac	hments for (1) community of	ficial, (2) insurance a	agent/company, and (3) building owner.
Comments (including type of equipment and location			
A9. Flood Flaps Flood Vents Model #FFWFO8 220 se	quare inches per vent for a	total of 3300.	
C2. e) Air conditioner unit elevated on the east side o	f structure.		

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

				THE RESERVE OF THE PERSON NAMED IN COLUMN 2 IN COLUMN
IMPORTANT: In these spaces, copy the correspondi	ng Information from Section	ı A.	FOR INSURA	NCE COMPANY US
Building Street Address (including Apt., Unit, Suite, and 605 Roundigee Drive	or Bldg. No.) or P.O. Route a	nd Box No.	Policy Numbe	
City	tate ZIP Coo	е	Company NAI	C Number
Longboat Key F	lorida 34228			
SECTION E – BUILDING ELE FOR ZONE	EVATION INFORMATION (AO AND ZONE A (WITHO	SURVEY NOT UT BFE)	REQUIRED)	
For Zones AO and A (without BFE), complete Items E1- complete Sections A, B,and C. For Items E1–E4, use no enter meters.				
E1. Provide elevation information for the following and the highest adjacent grade (HAG) and the lowest a	check the appropriate boxes to discent grade (LAG).	o show whether	the elevation i	s above or below
 a) Top of bottom floor (including basement, 				
crawlspace, or enclosure) is	turning defluenchman , recommendated	feet meter	s above o	r Delow the HA
 Top of bottom floor (including basement, crawlspace, or enclosure) is 		feet meter	s above o	r Delow the LAC
E2. For Building Diagrams 6–9 with permanent flood or the next higher floor (elevation C2.b in	penings provided in Section A	Items 8 and/or	9 (see pages 1	–2 of Instructions),.
the diagrams) of the building is		feet meter	s above o	r Delow the HAC
E3. Attached garage (top of slab) is		feet meter	s above o	r 🗌 below the HAC
E4. Top of platform of machinery and/or equipment servicing the building is		feet meter	s Пabove o	r ☐below the HA0
E5. Zone AO only: If no flood depth number is available floodplain management ordinance?	e, is the top of the bottom floo	r elevated in acc al official must d	cordance with the	ne community's nation in Section G
SECTION F - PROPERTY OWN	ER (OR OWNER'S REPRES	ENTATIVE) CE	RTIFICATION	
The property owner or owner's authorized representative community-issued BFE) or Zone AO must sign here. The	e who completes Sections A, e statements in Sections A, E	B, and E for Zo , and E are cor	ne A (without a rect to the best	FEMA-issued or of my knowledge.
Property Owner or Owner's Authorized Representative's	s Name			A Australia de Carta
Address	City	Sta	ate	ZIP Code
Signature	Date	Te	lephone	
			ернопе	
D			ерлопе	
Comments			ернопе	
Comments			ернопе	
Comments			ериопе	1
Comments			ериопе	A
Comments			ериопе	
Comments				
Comments			ECEI	VED
Comments				VED
Comments		R	ECEI JAN 19	VED 2017
Comments		TO	ECEI	VED 2017

Check here if attachments.

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corre	esponding information from Se	ction A.	FOR INSURANCE COMPANY USE		
			Policy Number:		
605 Roundtree Drive					
City Longboat Key		Code 228	Company NAIC Number		
	ON G - COMMUNITY INFORMA				
The local official who is authorized by law or or Sections A, B, C (or E), and G of this Elevation used in Items G8–G10. In Puerto Rico only, en	Certificate. Complete the applica	inity's floodplain ma able item(s) and sign	nagement ordinance can complete below. Check the measurement		
G1. The information in Section C was tak engineer, or architect who is authoriz data in the Comments area below.)	en from other documentation that led by law to certify elevation info	t has been signed a rmation. (Indicate th	nd sealed by a licensed surveyor, e source and date of the elevation		
G2. A community official completed Section Zone AO.	ion E for a building located in Zor	e A (without a FEM	A-issued or community-issued BFE)		
G3. The following information (Items G4-	-G10) is provided for community t	loodplain managem	ent purposes.		
G4. Permit Number	G5. Date Permit Issued		Date Certificate of Compliance/Occupancy Issued		
BP.32988	08/12/15	0	2/02/17		
G7. This permit has been issued for:	New Construction 🔲 Substant	ial Improvement			
G8. Elevation of as-built lowest floor (including of the building:	g basement)	feet	meters Datum		
G9. BFE or (in Zone AO) depth of flooding at	the building site;	feet	meters Datum		
G10. Community's design flood elevation:		feet	meters Datum		
Darin D. Cushing	Title 1	Building C	Hicial		
Community Name	Telepho	one J 41-316-196	56		
Signature	Date 02	102/17	20		
Comments (including type of equipment and lo	cation, per C2(e), if applicable)				
Changed street name	by strike thro	ugh, Rou	ntree w/ no		
"d" is the correct.	spelling. Block	A-2			
	_				
		£7) E	CEN/ES		
		M	CEIVED		
	JAN 1 9 2017				
TOWN OF LONGBOAT KEY Planning, Zening and Building					
÷ *			Check here if attachments.		

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the	FOR INSURANCE COMPANY USE		
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 605 Roundtree Drive			Policy Number:
City Longboat Key	State Florida	ZIP Code 34228	Company NAIC Number

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Photo One Caption



Photo Two Caption

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

Continuation Page

OMB No. 1660-0008 Expiration Date: November 30, 2018

MPORTANT: In these spaces, copy the corresponding information from Section A. FOR INSURANCE COMPANY US			
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 605 Roundtree Drive			Policy Number:
City	State	ZIP Code	Company NAIC Number
Longboat Key	Florida	34228	

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo One Caption

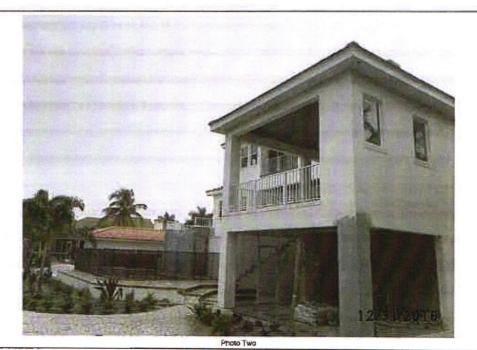


Photo Two Caption



ICC-ES Evaluation Report

ESR-3560

Reissued September 2015

This report is subject to renewal September 2017.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

FLOOD FLAPS®, LLC
2707 WATERPOINTE CIRCLE
MT. PLEASANT, SOUTH CAROLINA 29466
(843) 849-8031
www.floodflaps.com
info@floodflaps.com

EVALUATION SUBJECT:

FLOOD FLAPS® FLOOD VENTS: MODELS FFWF12; FFNF12; FFWF08; FFNF08; FFWF05; FFNF05

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2012 and 2009 International Building Code® (IBC)
- 2012 and 2009 International Residential Code® (IRC)

Properties evaluated:

- Physical operation
- Water flow
- Weathering

2.0 USES

Flood Flaps® are used to provide for the equalization of hydrostatic flood forces on exterior walls.

3.0 DESCRIPTION

3.1 General:

Flood Flaps® flood vents are engineered mechanically operated flood vents (FVs) that automatically allow flood waters to enter and exit enclosed areas. The FVs are constructed of ABS plastic which serves as the FV's housing, and a front grill that contains an anodized metal screen imbedded in polypropylene plastic. On contact with rising flood water, the grill will disengage from its secured position, allowing flood water and debris to flow through in either direction.

The sealed series models contain two rubber flaps that close the FV to the passage of air when using with conditioned areas or sealed crawl spaces. In the same manner as the grill, the two rubber flaps are pushed open by water pressure, allowing water and debris to flow

through the FV in either direction. See Figure 1 for an illustration of the Flood Flaps[®] FV.

3.2 Engineered Opening:

The Flood Flaps® FVs comply with the design principle noted in Section 2.6.2.2 of ASCE/SEI 24 for a rate of rise and fall of 5 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Flood Flaps® FVs must be installed in accordance with Section 4.0.

3.3 Model Sizes:

The Flood Flaps® FV model designations and sizes are as follows:

MODEL	WIDTH (in)	HIGHT (in)	DEPTH (in)
FFWF12 FFNF12	15 ⁵ / ₈	73/4	12
FFWF08 FFNF08	15 ⁵ / ₈	7 ³ / ₄	8
FFWF05 FFNF05	15 ⁵ / ₈	73/4	5

For SI: 1 inch = 25.4 mm.

The FFWF series include two rubber flaps for the prevention of air flow. The FFNF series omit the rubber flaps.

3.4 Ventilation:

Flood Flaps® FV models FFNF12, FFNF08, FFNF05, and FFNF02 have metal screens with ¹/₄ inch by ¹/₄ inch (6 mm by 6 mm) openings and provide 37 square inches of net free opening to supply natural ventilation for under-floor ventilation. Flood Flaps® FV models FFWF12, FFWF08, and FFWF05 have not been evaluated for use as openings for under-floor ventilation.

4.0 DESIGN AND INSTALLATION

Flood Flaps® FVs are designed to be installed into walls of existing or new construction. Installation of the FVs must be in accordance with the manufacturer's instructions, the applicable code and this report. Flood Flaps® FVs can be installed in wood, masonry and concrete walls up to a thickness of 12 inches (305 mm). In order to comply with the engineered opening design principle noted in Section 2.6.2.2 of ASCE/SEI 24, the Flood Flaps® FVs must be installed as follows:

■ With a minimum of two openings on different sides of each enclosed area.

JAN 19 2017

TOWN OF LONGBOAT KEY

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, her are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.



- With a minimum of one FV for every 220 square feet (20 m²) of enclosed area.
- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305 mm) above grade.

5.0 CONDITIONS OF USE

The Flood Flaps[®] flood vents described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Flood Flaps® FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern. 5.2 The Flood Flaps® FVs must not be used in place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated October 2013.

7.0 IDENTIFICATION

The Flood Flaps models recognized in this report are identified by a label bearing the manufacturer's name, the model number, and the evaluation report number (ESR-3560).

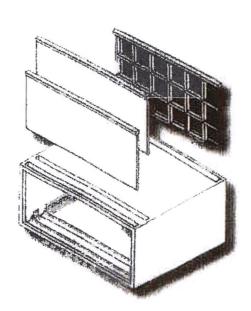


FIGURE 1-FLOOD FLAPS® FLOOD VENT