U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency

OMB Control No. 1660-0008 Expiration Date: 06/30/2026

Federal Emergency Management Agency
National Flood Insurance Program

ELEVATION CERTIFICATE
IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PROPERTY INFORMATION	FOR INSURANCE COMPANY USE					
A1. Building Owner's Name: Phil BBolles Burke and Kelly Parker Burke	Policy Number:					
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.: 639 Bayview Drive	Company NAIC Number:					
City: Longboat Key State: FL	ZIP Code: 34228					
A3. Property Description (e.g., Lot and Block Numbers or Legal Description) and/or Tax Parcel Nur Manatee County 7860200000 Lot 14 Bayview Estates PB 7 PG 81 Sleepy Lagoon unreco						
A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.): Residential						
A5. Latitude/Longitude: Lat. 27°25'51.40"N Long. 82°40'25.69"W Horiz. Datum:	NAD 1927 ⊠ NAD 1983 □ WGS 84					
A6. Attach at least two and when possible four clear color photographs (one for each side) of the bo	uilding (see Form pages 7 and 8).					
A7. Building Diagram Number:1B						
A8. For a building with a crawlspace or enclosure(s):						
a) Square footage of crawlspace or enclosure(s): 744 sq. ft.						
b) Is there at least one permanent flood opening on two different sides of each enclosed area?	⊠ Yes ☐ No ☐ N/A					
 c) Enter number of permanent flood openings in the crawlspace or enclosure(s) within 1.0 foot Non-engineered flood openings:	above adjacent grade:					
d) Total net open area of non-engineered flood openings in A8.c:N/A sq. in.						
e) Total rated area of engineered flood openings in A8.c (attach documentation - see Instruction	ons): 1200 sq. ft.					
f) Sum of A8.d and A8.e rated area (if applicable – see Instructions): N/A sq. ft.	RECEIVED					
A9. For a building with an attached garage:	VELVEL					
a) Square footage of attached garage:N/A sq. ft.	JAN 2 5 2024					
b) Is there at least one permanent flood opening on two different sides of the attached garage?	Yes Yes ON NAGBOAT KE					
 c) Enter number of permanent flood openings in the attached garage within 1.0 foot above adjated Non-engineered flood openings: N/A Engineered flood openings: N/A 						
d) Total net open area of non-engineered flood openings in A9.c:N/A sq. in.						
e) Total rated area of engineered flood openings in A9.c (attach documentation - see Instruction	ons): N/A sq. ft.					
f) Sum of A9.d and A9.e rated area (if applicable – see Instructions):N/A sq. ft.						
SECTION B - FLOOD INSURANCE RATE MAP (FIRM) INFOR	RMATION					
B1.a. NFIP Community Name: Town of Longboat Key B1.b. NFIP Community	munity Identification Number: 125126					
B2. County Name: Manatee B3. State: FL B4. Map/Panel No.: 1	2081C 0291 B5. Suffix: F					
B6. FIRM Index Date: 08/10/2021 B7. FIRM Panel Effective/Revised Date: 08/10/20	21					
B8. Flood Zone(s): AE B9. Base Flood Elevation(s) (BFE) (Zone AO, use E	Base Flood Depth): 9					
B10. Indicate the source of the BFE data or Base Flood Depth entered in Item B9: FIS FIRM Community Determined Other:						
B11. Indicate elevation datum used for BFE in Item B9: ☐ NGVD 1929 ☐ NAVD 1988 ☐ Other.						
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)? Yes No Designation Date: CBRS OPA						
B13. Is the building located seaward of the Limit of Moderate Wave Action (LiMWA)?	No					

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 4.44

639 Bayview Drive	nit, Suite, and/or Bldg. No.) or P.O. Route and B	ox No.:	FOR INSUR	RANCE COMPANY US
City: Longboat Key	8	Policy Number:		
SECTION C -	1 (0)	ompany NA	AIC Number:	
C1. Building elevations are based on:	BUILDING ELEVATION INFORMATION	(SURVEY RE	QUIRED)	
	☐ Construction Drawings* ☐ Building United When construction of the building is construction of the building is construction.			
Benchmark Utilized: FL DEP 1385				-A30, AR/AH, AR/AO, ly, enter meters.
Indicate elevation datum used for the elevation NGVD 1929 NAVD 1988	vations in items a) through h) below. Other:			
	be the same as that used for the BFE. Conversion factor in the Section D Comments area.	sion factor used	? 🛭 Ye	es No
 a) Top of bottom floor (including base 	ement, crawlspace, or enclosure floor):	10	Check	the measurement use et meters
b) Top of the next higher floor (see Ir		14		
 c) Bottom of the lowest horizontal str 	uctural member (see Instructions):	N/	_ 🖂	
d) Attached garage (top of slab):		N/		
 e) Lowest elevation of Machinery and (describe type of M&E and location 	d Equipment (M&E) servicing the building in Section D Comments area):			
f) Lowest Adjacent Grade (LAG) nex	t to building: Natural Finished	13.		et meters
g) Highest Adjacent Grade (HAG) nex	xt to building: Natural Finished	3.		t meters
h) Finished LAG at lowest elevation o	f attached deck or stairs, including structural	3.	5 ⊠ fee	t meters
support:	structural	3.	7 🗆 🖘	
SECTION D -	SURVEYOR, ENGINEER, OR ARCHITE			t meters
nformation. I certify that the information on	I by a land surveyor, engineer, or architect aut this Certificate represents my best efforts to in or imprisonment under 18 U.S. Code, Section	horized by state		fy elevation understand that any
Vere latitude and longitude in Section A pro	ovided by a licensed land surveyor? Yes	TILL	IVE	:D
Check here if attachments and describe	in the Comments area.		5 2024	11111111111111111111111111111111111111
ertifier's Name: Kenneth R. Palmer	License Number: PSM #46			100 Co. Co. Co.
itle: Project Manager		Planning, Zor	ning & Build	ng
company Name: Red Stake Surveyors, In	nc.		300	
ddress: 6389 Tower Lane, Level II`			ESA	2) 2
ity: Sarasota	State: FL ZIP Code: 34.	240	1/	To and the
elephone: (941) 923-9997 Ext.:	Email:	240	VF	75 56
ignature: Limited P) Date: 1~2	2 21	Plac	e Seal Here
opy all pages of this Elevation Certificate and	d all attachments for (1) community official, (2) in			
omments (including source of conversion for 5). Measured with a hand-held GPS December 2	actor in C2; type of equipment and location ne	r C2.e; and desc	cription of a	ny attachments):
TTACHMENT: ADDITIONAL PHOTOS	S AIR CONDITIONER AND VENT PHOTO NGBOAT KEY FINAL FEMA CERTIFICA) FASTERIV	SIDE OF	CTDLICTURE

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11

Building Street Address (including Apt., Unit, Suite, and/or 639 Bayview Drive	Bldg. No.) or P.O. Route and B	Box No.:	FOR INSURAN	CE COMPANY USE
City: Longboat Key State	e: FL ZIP Code: 342	28	Policy Number: _ Company NAIC	
SECTION E - BUILDING MEAS	UREMENT INFORMATIO	N (SURVEY)		
	NE AR/AO, AND ZONE A			
For Zones AO, AR/AO, and A (without BFE), complete I intended to support a Letter of Map Change request, coenter meters.				
Building measurements are based on: Construction*A new Elevation Certificate will be required when constructions.			n* Finished (Construction
E1. Provide measurements (C.2.a in applicable Buildin measurement is above or below the natural HAG a		nd check the a	ppropriate boxes t	o show whether the
 a) Top of bottom floor (including basement, crawlspace, or enclosure) is: 		meters	above or	below the HAG.
b) Top of bottom floor (including basement, crawlspace, or enclosure) is:		☐ meters	above or	below the LAG.
E2. For Building Diagrams 6-9 with permanent flood on	penings provided in Section A	Items 8 and/or	9 (see pages 1–2	of Instructions), the
next higher floor (C2.b in applicable Building Diagram) of the building is:	☐ feet	meters	above or	below the HAG.
E3. Attached garage (top of slab) is:	feet	meters	above or	below the HAG.
E4. Top of platform of machinery and/or equipment servicing the building is:	feet	meters	above or	below the HAG.
E5. Zone AO only: If no flood depth number is available floodplain management ordinance? Yes	e, is the top of the bottom floor	elevated in ac	cordance with the st certify this infor	community's mation in Section G.
SECTION F - PROPERTY OWNER (OR	OWNER'S AUTHORIZED	REPRESEN	TATIVE) CERTI	FICATION
The property owner or owner's authorized representative	•		one A (without BFI	E) or Zone AO must
sign here. The statements in Sections A, B, and E are of Check here if attachments and describe in the Com-	· · · · ·	eage		:H10
Property Owner or Owner's Authorized Representative				1. 8 4 1 · · · · ·
Address:				11111
City:		State:	ZIP Code:	
	nail:			
Signature:	Date:			
Comments:		,		
			REC	EIVED
			JAN	2 5 2024
				ONGBOAT KEY oning & Building
	BLDG PERMIT FILE Copy of Reco	PLANS Prd		
				.7-17.

11.31

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11

	ng Street Address (including Apt., Unit, Suite, and/or Bldg. No.) o	r P.O. Route and B	ox No.:	FOR INS	URANCE COMPANY USE		
	Longboat Key State: FL	ZIP Code: 3422	 08	Policy Nur	mber:		
Oity.	State. 1 L	ZIF Code. <u>5422</u>		Company	NAIC Number:		
	SECTION G - COMMUNITY INFORMATION (RECOM	IMENDED FOR	COMMUN	ITY OFFICIA	L COMPLETION)		
	ocal official who is authorized by law or ordinance to administe on A, B, C, E, G, or H of this Elevation Certificate. Complete th				rdinance can complete		
G1.	G1. The information in Section C was taken from other documentation that has been signed and sealed by a licensed surveyor, engineer, or architect who is authorized by state law to certify elevation information. (Indicate the source and date of the elevation data in the Comments area below.)						
G2.a.	A local official completed Section E for a building located E5 is completed for a building located in Zone AO.	l in Zone A (withou	ut a BFE), Z	one AO, or Zo	ne AR/AO, or when item		
G2.b.	☐ A local official completed Section H for insurance purpos	ses.					
G3.	☐ In the Comments area of Section G, the local official des	cribes specific cor	rections to t	the information	n in Sections A, B, E and H.		
G4.	☐ The following information (Items G5–G11) is provided for	r community flood	plain manag	ement purpos	es.		
G5.	Permit Number: G6. Date Pe	ermit Issued:	-				
G7.	Date Certificate of Compliance/Occupancy Issued:						
G8.	This permit has been issued for: New Construction	Substantial Impro	vement				
G9.a.	Elevation of as-built lowest floor (including basement) of the building:	-	feet	meters	Datum:		
G9.b.	Elevation of bottom of as-built lowest horizontal structural member:		_ [feet	meters	Datum:		
G10.a	. BFE (or depth in Zone AO) of flooding at the building site:		feet	meters	Datum:		
G10.b	 Community's minimum elevation (or depth in Zone AO) requirement for the lowest floor or lowest horizontal structura member: 	ıl 	_ [] feet	meters	Datum:		
G11.	Variance issued?	ntation and descri	be in the Co	mments area	•		
The local official who provides information in Section G must sign here. I have completed the information in Section G and certify that it is correct to the best of my knowledge. If applicable, I have also provided specific corrections in the Comments area of this section.							
Local	Official's Name:	Title:					
NFIP (Community Name:						
Teleph							
Addre	ss:						
			State:	ZIP C	ode:		
	ture:						
	nents (including type of equipment and location, per C2.e; desc ns A, B, D, E, or H):	cription of any atta	chments; ar	nd corrections	to specific information in		

RECEIVED

JAN 2 5 2024

TOWN OF LONGBOAT KEY Planning, Zoning & Building

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11

Building Street Address (includin	g Apt., Unit, Suite,	, and/or Bldg. No.) or	P.O. Route and Box No.:	FOR INSURANCE COMPANY USE
639 Bayview Drive		Otata: El	710.0-4 24000	Policy Number:
City: Longboat Key		_ State:	ZIP Code: 34228	Company NAIC Number:
			HEIGHT INFORMATION	
to determine the building's first	floor height for ins tenth of a meter i	surance purposes. S in Puerto Rico). <i>Refe</i>	ections A, B, and I must also erence the Foundation Type	ay complete Section H for all flood zones be completed. Enter heights to the e Diagrams (at the end of Section H to complete this section.
H1. Provide the height of the to	p of the floor (as	indicated in Foundat	tion Type Diagrams) above tl	he Lowest Adjacent Grade (LAG):
 a) For Building Diagrams floor (include above-grade crawlspaces or enclosure f 	floors only for bui		[feet	meters above the LAG
b) For Building Diagrams higher floor (i.e., the floor a enclosure floor) is:				meters above the LAG
H2. Is all Machinery and Equip H2 arrow (shown in the Foundament of Page 1) Yes No	ment servicing th undation Type Dia	e building (as listed i agrams at end of Sed	n Item H2 instructions) eleva ction H instructions) for the a	ated to or above the floor indicated by the ppropriate Building Diagram?
SECTION I - PROI	PERTY OWNER	R (OR OWNER'S	AUTHORIZED REPRESE	NTATIVE) CERTIFICATION
A, B, and H are correct to the be indicate in Item G2.b and sign S Check here if attachments a	est of my knowled Section G.	dge. Note: If the loca	I floodplain management offi	ast sign here. The statements in Sections icial completed Section H, they should nent in the Comments area.
Property Owner or Owner's Auti	norized Represer	ntative Name:		
Address:				
City:		****	State:	ZIP Code:
Telephone:	Ext.:	Email:		
Signature:			Date:	
Comments:				
				RECE.
				RECEIVED
				JAN 2 5 2024 TOWN OF LONGBOAT KEY Planning, Zoning & Building
			BLDG PERMIT P FILE Copy of Reco	LANS

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11 BUILDING PHOTOGRAPHS

See Instructions for Item A6.

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.:				FOR INSURANCE COMPANY USE
639 Bayview Drive City: Longboat Key	State:_	FL	ZIP Code: <u>34228</u>	Policy Number: Company NAIC Number:

Instructions: Insert below at least two and when possible four photographs showing each side of the building (for example, may only be able to take front and back pictures of townhouses/rowhouses). Identify all photographs with the date taken and "Front View," "Rear View," "Right Side View," or "Left Side View." Photographs must show the foundation. When flood openings are present, include at least one close-up photograph of representative flood openings or vents, as indicated in Sections A8 and A9.



Photo One

Photo One Caption: FRONT PHOTO TAKEN ON JANUARY 22, 2024

Clear Photo One



Photo Two

Photo Two Caption: GARAGE PHOTO TAKEN ON JANUARY 22, 2024

Clear Photo Two

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11 BUILDING PHOTOGRAPHS

Continuation Page

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.:				FOR INSURANCE COMPANY USE	
639 Bayview Drive City: Longboat Key	State:	FL	_ ZIP Code:	34228	Policy Number: Company NAIC Number:

Insert the third and fourth photographs below. Identify all photographs with the date taken and "Front View," "Rear View," "Right Side View," or "Left Side View." When flood openings are present, include at least one close-up photograph of representative flood openings or vents, as indicated in Sections A8 and A9.



Photo Three

Photo Three Caption: REAR PHOTO TAKEN ON JANUARY 22, 2024

Clear Photo Three



Photo Four

Photo Four Caption: SIDE AND REAR PHOTO TAKEN ON JANUARY 22, 2024

Clear Photo Four

11020143

639 BAYVIEW DRIVE


LONGBOAT KEY, FL, 34228

* ATTACHMENT PAGE TO FEMA ELEVATION CERTIFICATE *



VENT PHOTO TAKEN ON JANUARY 22, 2024



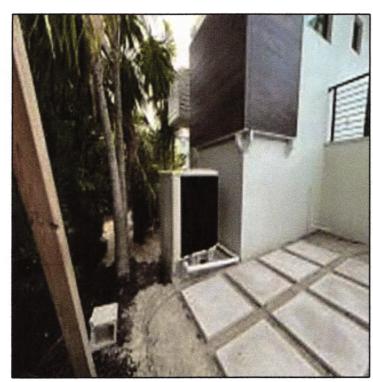

IR CONDITIONER PHOTO TAKEN ON JANUARY 22, 2024

TOM AN STORY TO STORY



Most Widely Accepted and Trusted

ESR-2074

Reissued 02/2021 Revised 04/2021 This report is subject to renewal 02/2023

ICC-ES Evaluation Report

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

DIVISION: 08 00 00—OPENINGS

SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

Copy FIRMIT PLANS

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521 #1540-510 #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526



RECEIVED

JAN 3 1 2024
TOWN OF LONGBOAT KEY
Planning, Zoning & Building

"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"

A Subsidiary of CODE

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.





ICC-ES Evaluation Report

ESR-2074

Reissued February 2021 Revised April 2021

This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2021, 2018, 2015, 2012, 2009 and 2006 International Building Code[®] (IBC)
- 2021, 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2021, 2018 International Energy Conservation Code[®] (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)†

 † The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces. Each unit is

fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit

3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with ¹/₄-inch-by-¹/₄-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs described in this report do not offer natural ventilation

3.4 Flood Vent Sealing Kit:

The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT® Model #1540-520. It is a Homasote 440 Sound Barrier® (ESR-1374) insert with 21 – 2-inch-by-2-inch (51 mm \times 51 mm) squares cut in it. See Figure 4.

4.0 DESIGN AND INSTALLATION

4.1 SmartVENT® and FloodVENT®:

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

With a minimum of two openings on different sides of each enclosed area.



- With a minimum of one FV for every 200 square feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.
- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

4.2 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT® Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.56 l/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern.

5.2 The Smart Vent[®] FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised February 2021).
- **6.2** Test report on air infiltration in accordance with ASTM F283

7.0 IDENTIFICATION

- 7.1 The Smart VENT® models and the Flood Vent Sealing Kit described in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- 7.2 The report holder's contact information is the following:

SMART VENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

TABLE 1-MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT®	1540-520	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT®	1540-510	15 ³ / ₄ " X 7 ³ / ₄ "	200
FloodVENT® Overhead Door	1540-524	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT® Overhead Door	1540-514	15 ³ / ₄ " X 7 ³ / ₄ "	200
Wood Wall FloodVENT®	1540-570	14" X 8 ³ / ₄ "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 ³ / ₄ "	200
SmartVENT® Stacker	1540-511	16" X 16"	400
FloodVent® Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m^2

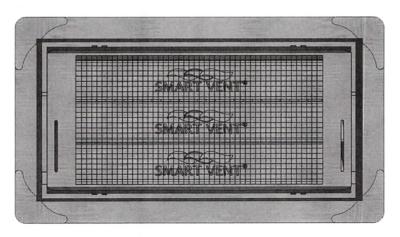


FIGURE 1-SMART VENT: MODEL 1540-510

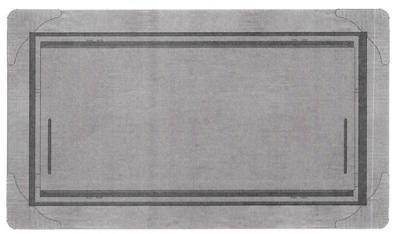


FIGURE 2—SMART VENT MODEL 1540-520

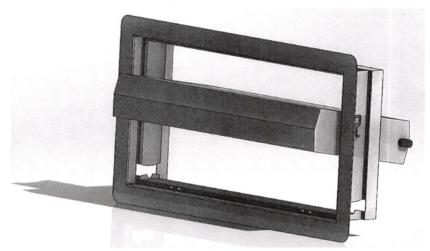


FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN

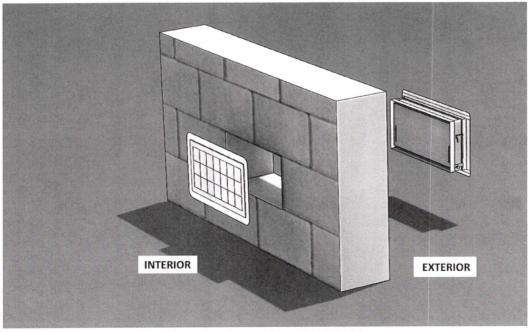


FIGURE 4—FLOOD VENT SEALING KIT



ICC-ES Evaluation Report

ESR-2074 CBC and CRC Supplement

Reissued February 2021 Revised April 2021 This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514
FLOOD VENT SEALING KIT #1540-526

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, described in ICC-ES evaluation report ESR-2074, have also been evaluated for compliance with codes noted below.

Applicable code editions:

■ 2019 California Building Code (CBC)

For evaluation of applicable chapters adopted by the California Office of Statewide Health Planning and Development (OSHPD) and Division of State Architect (DSA), see Sections 2.1.1 and 2.1.2 below.

■ 2019 California Residential Code (CRC)

2.0 CONCLUSIONS

2.1 CBC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with 2019 CBC Chapter 12, provided the design and installation are in accordance with the 2018 *International Building Code*® (IBC) provisions noted in the evaluation report and the additional requirements of CBC Chapters 12 and 16, as applicable.

211 OSHPD

The applicable OSHPD Sections and Chapters of the CBC are beyond the scope of this supplement.

2.1.2 DSA:

The applicable DSA Sections and Chapters of the CBC are beyond the scope of this supplement.

2.2 CRC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with the 2019 CRC, provided the design and installation are in accordance with the 2018 *International Residential Code*® (IRC) provisions noted in the evaluation report.

This supplement expires concurrently with the evaluation report, reissued February 2021 and revised April 2021.





ICC-ES Evaluation Report

ESR-2074 FBC Supplement

Reissued February 2021 Revised April 2021 This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, described in ICC-ES evaluation report ESR-2074, have also been evaluated for compliance with the codes noted below.

Applicable code editions:

- 2020 Florida Building Code—Building
- 2020 Florida Building Code—Residential

2.0 CONCLUSIONS

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with the *Florida Building Code—Building* and the *Florida Building Code-Residential*, provided the design requirements are determined in accordance with the *Florida Building Code-Building* or the *Florida Building Code-Residential*, as applicable. The installation requirements noted in ICC-ES evaluation report ESR-2074 for 2018 *International Building Code®* meet the requirements of the *Florida Building Code-Building* or the *Florida Building Code-Residential*, as applicable.

Use of the Smart Vent® Automatic Foundation Flood Vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the Florida Building Code—Building and the Florida Building Code—Residential.

For products falling under Florida Rule 61G20-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the evaluation report, reissued February 2021 and revised April 2021.

