

LEGEND

CHANGE IN PRIORITY BAR PLACEMENT

- ① FIRST PRIORITY
- ② SECOND PRIORITY
- ③ THIRD PRIORITY

SLAB STEPS AND SLOPES  
(SEE ARCHITECTURAL DRAWINGS FOR EXACT LOCATIONS)

- ④ 3/4" DAP OUT
- ⑤ 3/4" STEP AT WALL LINE AND SLOPE SLAB TO EDGE

SLAB THICKNESS IN INCHES  
(SEE ARCHITECTURAL DRAWINGS FOR SLOPE DETAILS)

5-1/2	6-3/4	7-1/2
6	7	7-3/4
6-1/2	7-1/4	8

SLAB THICKNESSES SHOWN ARE MINIMUM DIMENSIONS.

SLAB NOTES

SLAB THICKNESS = 8" (EXCEPT WHERE NOTED ON TOP STEEL SHT.)

CONCRETE STRENGTH = 4000 PS-I.

REINFORCING STEEL


GRADE = A615-60

PLACEMENT NOTES & DETAILS = SHT. # S-14

(\*) BARS ARE ADD BARS & ARE IN ADDITION TO GRID REINF. SHOWN ON PLAN.

REFERENCE NOTES

- COLUMN SCHEDULE = SHT. # S15
- SHEARWALL SCHEDULE = SHT. # S16
- BEAM SCHEDULE = SHT. # S17

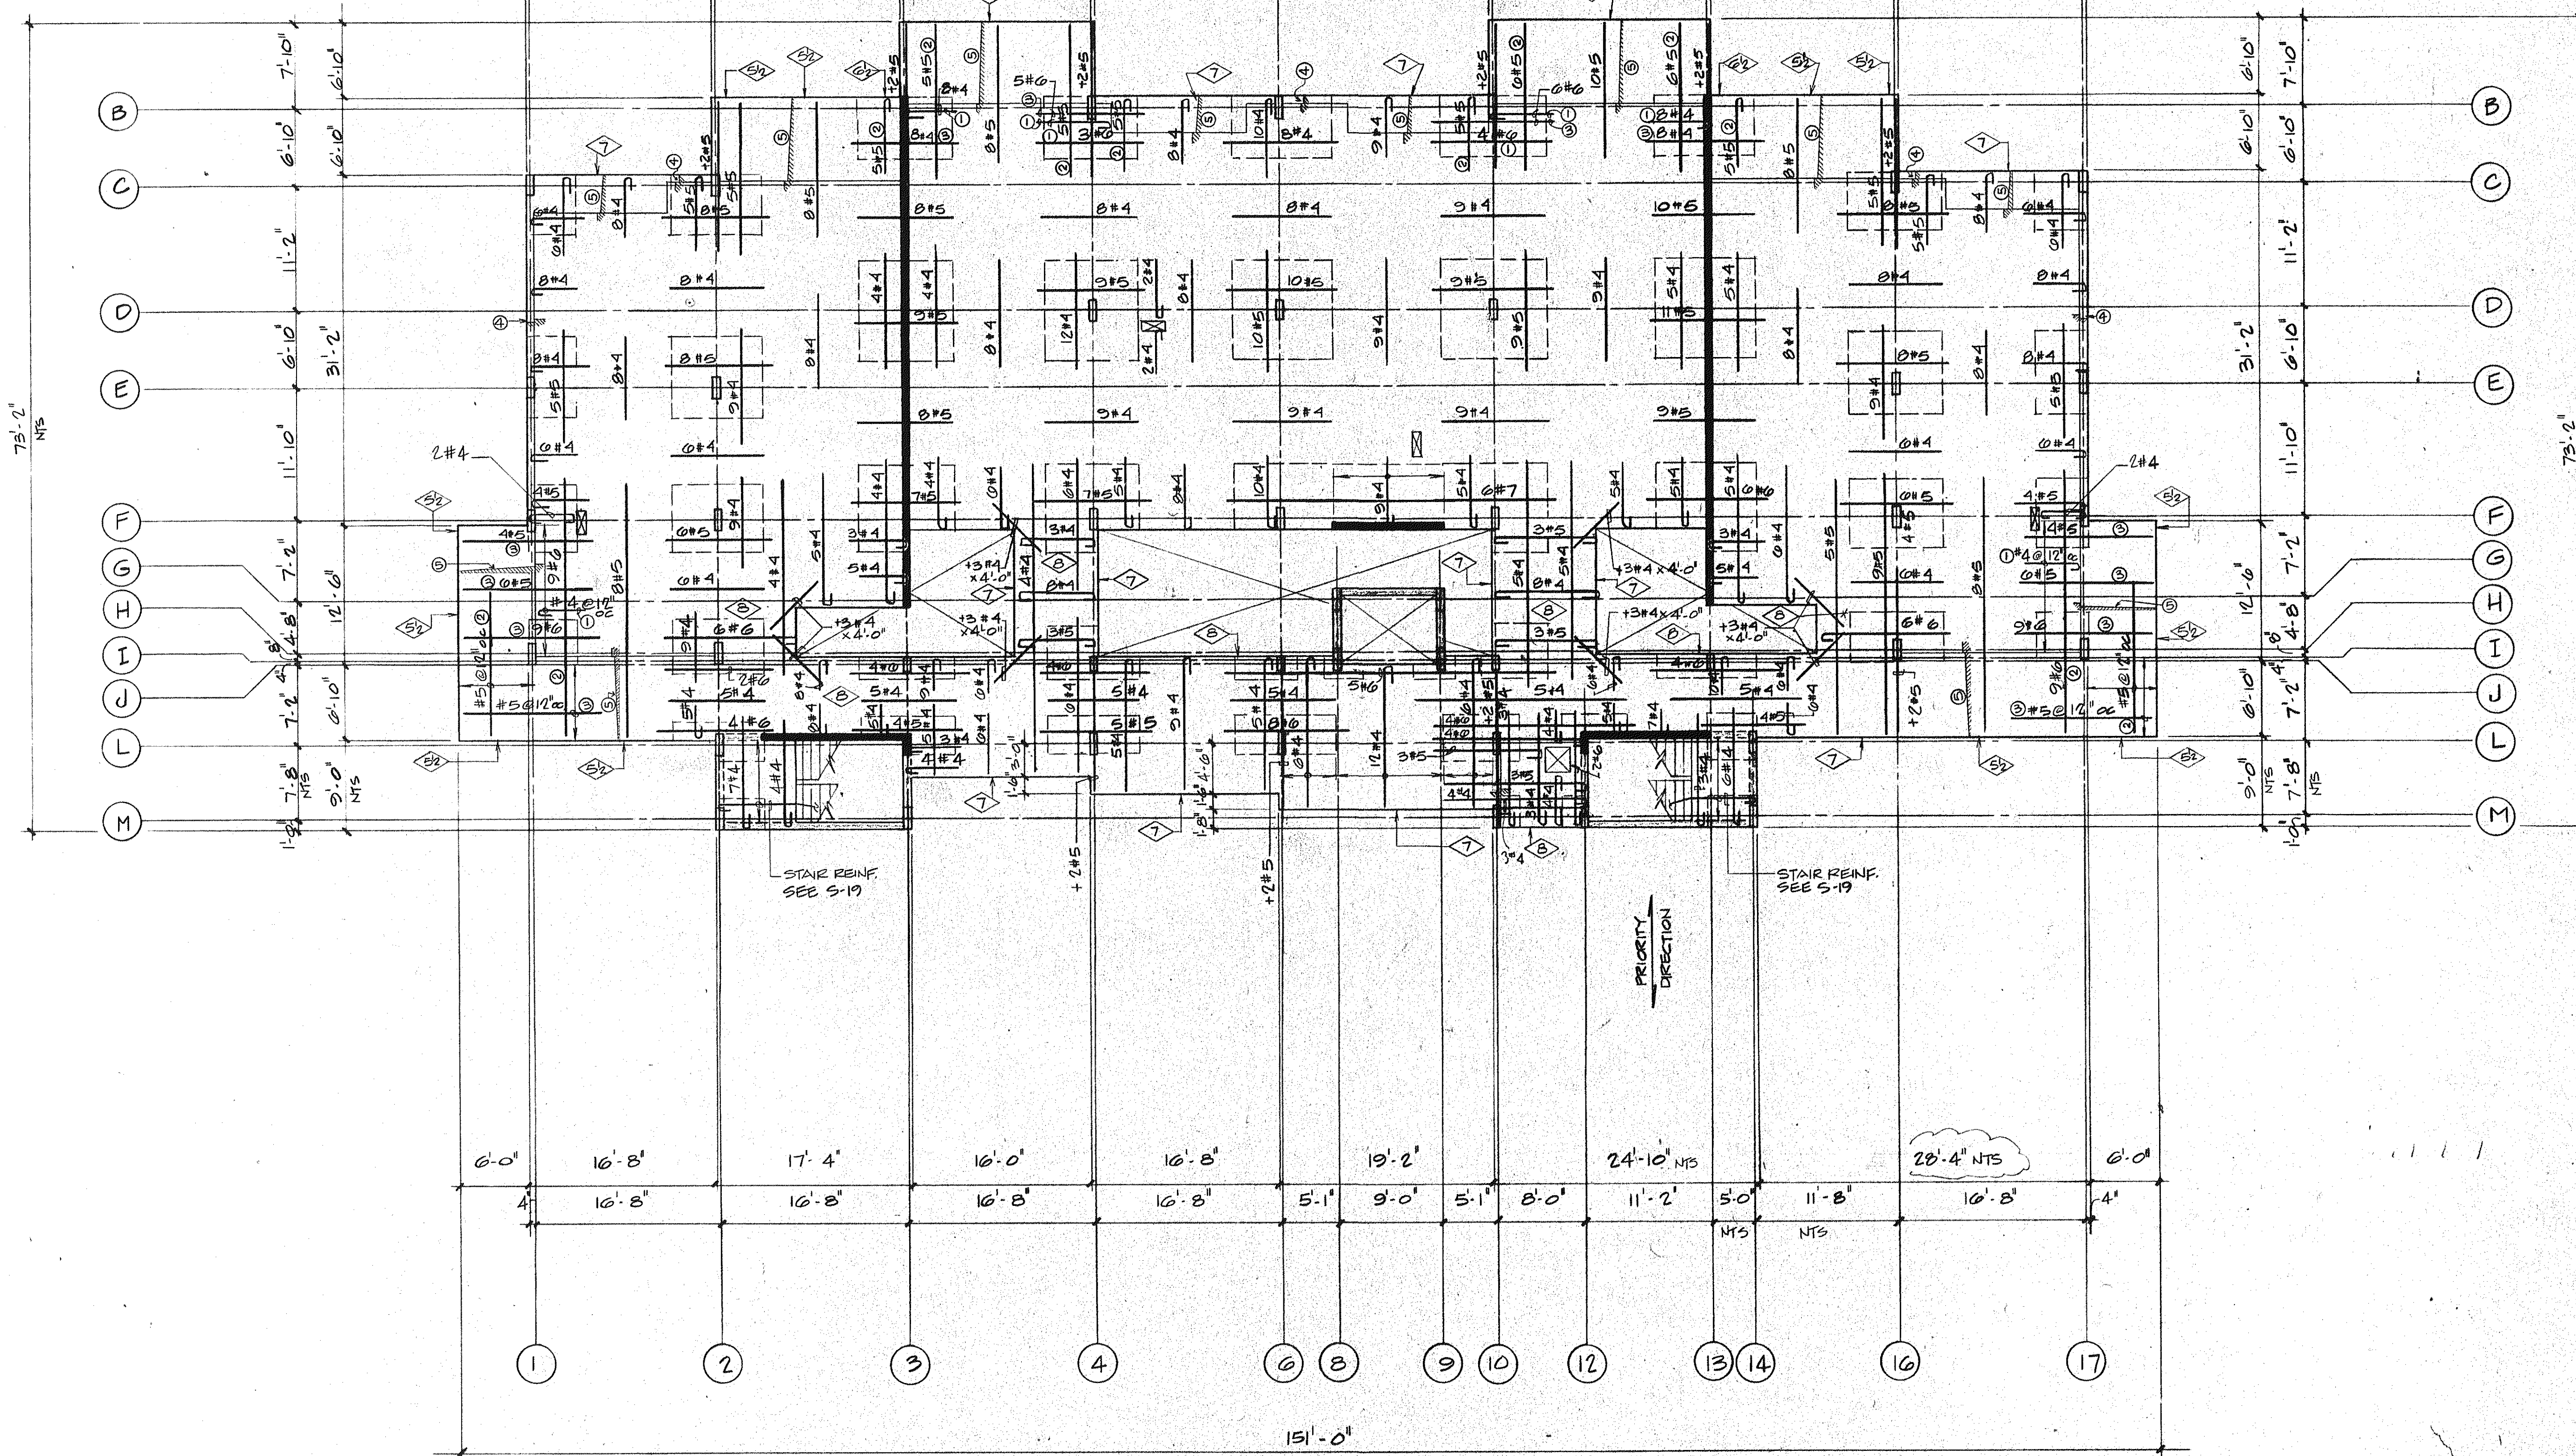

SUNSET BEACH  
SOFITON BOAT KEY

BLDG. - #1      FOURTH & FIFTH FLOOR  
TOP STEEL PLAN      1/8"=1'-0"

ARVIDA CORPORATION    EDWARD J. SEIBERT    AIA ARCHITECT & PLANNER, P.A.    THE SWA GROUP  
BRABHAM, KUHNS DEBAY CONSULTING ENGINEERS    OLSEN WHITE & ASSOCIATES' STRUCTURAL ENGINEERS    BENNETT & BISHOP, INC. CONSULTING ENGINEERS & SURVEYORS

ISSUED	12-10-82
REVISED	1-4-83
	4-1-83

SHEET  
**S11**  
OF 24